
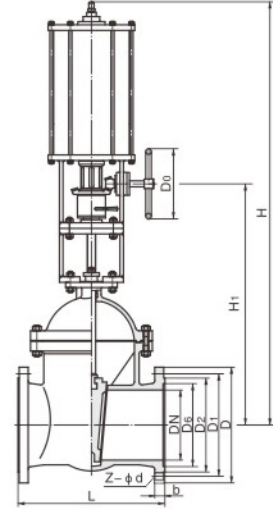


Z640H-PN16~40C/P/R

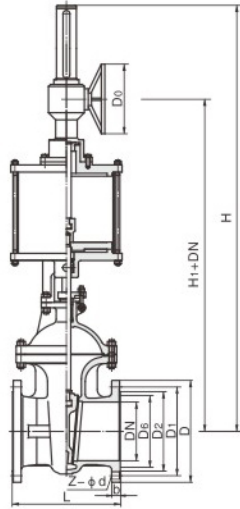

主要外形和连接尺寸 Main External and Connecting Dimension

单位 Unit: mm

公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main external and connecting dimensions									WT(Kg)
	L	D	D1	D2	b	Z-d	H	H1	D0	
	Z640H-16C			Z640Y-16		CZ40Y-16R				
50	250	165	125	99	20	4-Φ18	950	570	180	38
65	270	185	145	118	20	4-Φ18	1050	596	180	53
80	280	200	160	132	20	8-Φ18	1080	635	200	72
100	300	220	180	156	22	8-Φ18	1145	645	250	90
125	325	250	210	184	22	8-Φ18	1210	685	250	120
150	350	285	240	211	24	8-Φ22	1300	720	320	132
200	400	340	295	266	24	12-Φ22	1660	940	400	258
250	450	405	355	319	26	12-Φ26	1790	1020	400	297
300	500	460	410	370	25	12-Φ26	1990	1150	450	420
350	550	520	470	429	30	12-Φ26	2090	1170	450	558
400	600	580	525	480	32	16-Φ30	2290	1325	500	540
450	650	640	585	548	40	20-Φ30	2485	1465	500	1110
500	700	715	650	609	44	20-Φ33	2640	1590	550	1380
600	800	840	770	720	48	20-Φ36	2940	1720	550	1620
700	900	910	840	794	50	24-Φ36	3450	1960	600	1966
800	1000	1025	950	901	52	24-Φ39	3650	2190	600	2282
900	1100	1125	1050	1001	54	28-Φ39	3815	2400	800	2495
1000	1200	1255	1170	1112	56	28-Φ42	4000	2650	800	2760

Z640H-PN16~40C/P/R

主要外形和连接尺寸Main External and Connecting Dimensions										单位Unit:mm
公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main external and connecting dimensions									WT(Kg)
	L	D	D1	D2	b	Z-d	H	H1	D0	
Z640H-25			Z640H-25P			Z640Y-25R				
50	250	165	125	99	20	4-18	950	570	180	38
65	270	185	145	118	22	8-18	1050	596	180	55
80	280	200	160	132	24	8-18	1080	635	200	76
100	300	235	190	156	24	8-22	1145	645	250	94
125	325	270	220	184	26	8-26	1210	685	250	126
150	350	300	250	211	28	8-26	1300	720	320	136
200	400	360	320	274	30	12-26	1660	940	400	265
250	450	425	370	330	32	12-30	1790	1020	400	300
300	500	485	430	389	34	16-30	1990	1150	450	436
350	550	555	490	448	38	16-33	2090	1170	450	580
400	600	620	550	503	40	16-36	2290	1325	500	860
450	650	670	600	548	46	20-36	2485	1465	500	1260
500	700	730	660	609	48	20-36	2640	1590	550	1420
600	800	845	770	720	48	20-39	2940	1720	550	1710
700	900	960	875	820	50	21-42	3450	1960	600	2105
800	1000	1085	990	928	54	24-48	3650	2190	600	2310
900	1100	1185	1090	1028	58	28-48	3815	2400	800	2620
1000	1200	1320	1210	1140	62	28-55	4000	2650	800	2960

主要外形和连接尺寸Main External and Connection Dimension										单位Unit:mm	
公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main external and connecting dimensions									WT(Kg)	
	L	D	D1	D2	D6	b	Z-Φd	H	H1		D0
Z640H-40			Z640Y-40P			Z640Y-40R					
50	250	165	125	99	88	20	4-18	950	570	200	42
65	280	185	145	118	110	22	8-18	1050	596	200	68
80	320	200	160	132	121	24	8-18	1080	635	250	84
100	350	235	190	156	150	24	8-22	1145	645	320	102
125	400	270	220	184	176	26	8-26	1210	700	320	135
150	450	300	250	211	204	28	8-26	1330	750	400	156
200	550	375	320	284	260	34	12-30	1660	940	400	276
250	650	450	385	345	313	38	12-33	1820	1050	450	306
300	750	515	450	409	364	42	16-33	1990	1150	450	510
350	850	580	510	465	422	46	16-36	2110	1190	500	720
400	950	660	585	535	474	50	16-39	2335	1370	550	1050
450	1050	685	610	560	524	57	20-39	2490	1510	550	1320
500	1150	755	670	615	576	57	20-42	2640	1590	550	1800
600	1350	890	795	735	678	62	20-48	2940	1720	600	2160